


ASPHALT/CRUSHED ROCK

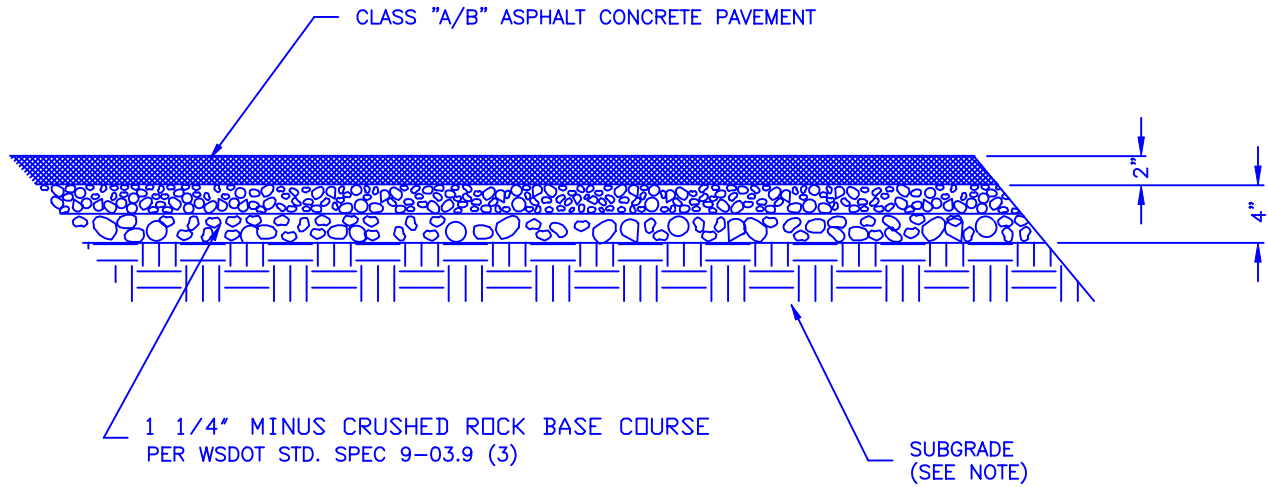

CONSTRUCTION NOTES:

BASE COURSE AND SUBGRADE SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY AS DETERMINED BY THE MODIFIED PROCTOR (ASTM D 1557).

A SOILS REPORT PREPARED BY A REGISTERED PROFESSIONAL ENGINEER SHALL CERTIFY THAT THE ABOVE SECTION IS ACCEPTABLE.

PRIVATE STREET & PARKING LOT

NOT TO SCALE

APPROVED: RICHARD BARTHOL
REV. DATE: JULY 1, 2000

ENGINEERING DIVISION



STANDARD DETAILS

PRIVATE STREET & PARKING LOT SECTION

FILE SD324.DWG | DRAWING NO. **324**